



37<sup>TH</sup> INTERNATIONAL  
**NO - DIG**  
FLORENCE 2019

Fortezza da Basso • FLORENCE (Italy)

30<sup>th</sup> September • 2<sup>nd</sup> October 2019

# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

NISII V.<sup>1</sup>, D'ALBERTO D. <sup>1</sup>, NAPOLITANO A. <sup>2</sup>, BRUCIATELLI L. <sup>1</sup>, TALLONE F. <sup>3</sup>

<sup>1</sup> ONSHORE E&C DIVISION, PIPELINE SPECIFIC ENGINEERING OFFICE, SAIPEM, ITALY

<sup>2</sup> ONSHORE E&C DIVISION, HEAD OF ONSHORE PIPELINE, SAIPEM, ITALY

<sup>3</sup> ONSHORE E&C DIVISION, LOSS PREVENTION & ENVIRONMENT DEPARTMENT MANAGER, SAIPEM, ITALY



# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS



## GENERAL SETTINGS

- ✓ In 2016 SAIPEM has been awarded from ITAL GAS STORAGE the EPC project of a gas storage system converting an underground depleted gas field located at Corneigliano Laudense, 30km SE of Milan, ITALY.
- ✓ The gas storage project consists in:

1. Surface facilities

for gas treatment & distribution into national gas network;



2. Wells in the reservoir

to inject/extract gas grouped in two Clusters (Cluster A & B);

3. Interconnection gas pipeline

Cluster A and Cluster B: **DN650 (24"), 170 barg, L=1.8km**

A 700m long section of the Interconnection gas pipeline crosses a densely urbanized area characterized by residential and commercial districts.

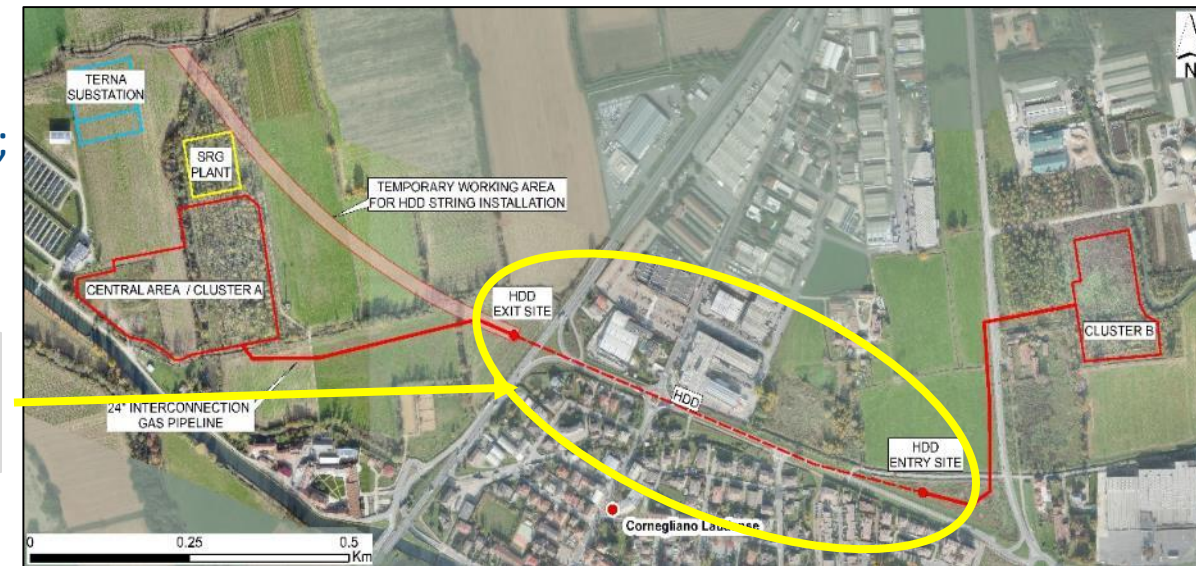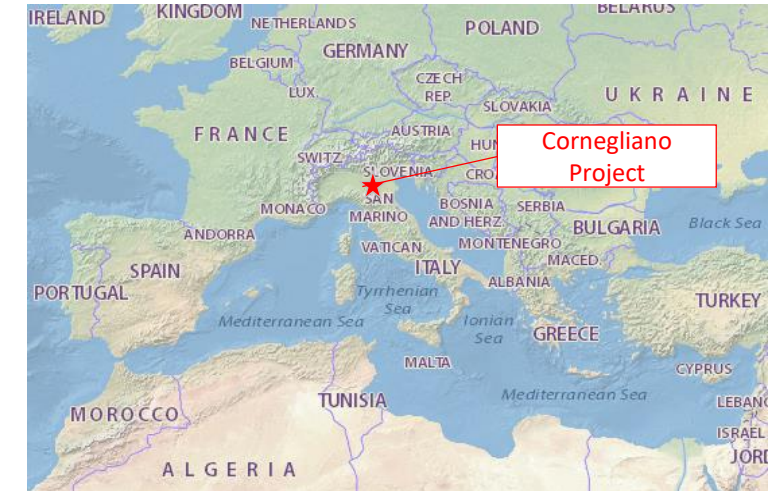




# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## FEED DESIGN MAJOR ISSUE


Project FEED foreseen for the DN650 (24"), 170 barg gas pipeline an OPEN CUT crossing of the urbanized area.

Major issues identified in this design:

- ✓ Critical distance between pipeline and existing buildings on roadside;
- ✓ Numerous existing services crossings;
- ✓ Strong impact of construction activities on traffic road;
- ✓ Strong impact of construction activities on local residential area (i.e. noise, vibration, pollution, etc.)

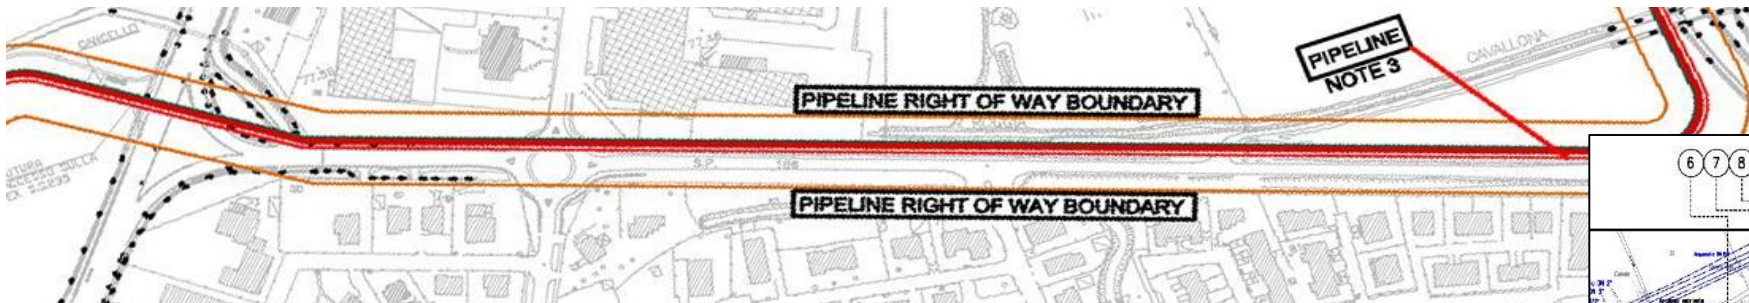


Existing services crossings

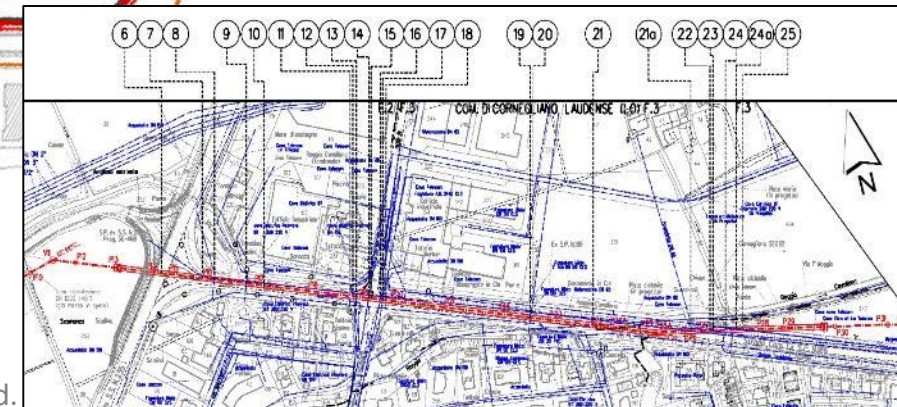

# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## PROPOSED DETAIL DESIGN SOLUTION

A 700m long **TRENCHLESS SOLUTION** was proposed to cross this densely urbanized area

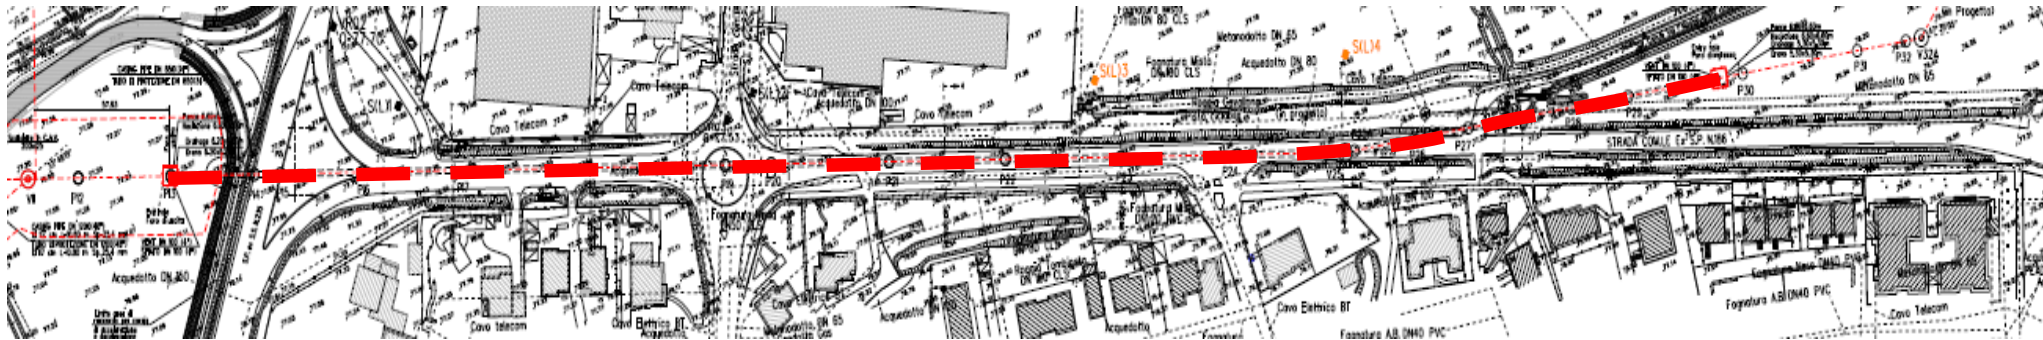

### MAJOR ISSUE TO THIS TRENCHLESS SOLUTION:

According to the National Gas Regulation, trenchless solution for pipeline crossing densely urbanized area shall be installed into a casing pipe, with seals and vents every 150m.

This code requirement represented a severe constrain to the proposed trenchless solution: L= 700m.

## CHALLENGING SOLUTIONS FOR CROSSING DESIGN

A special design was developed for this crossing to request a Concession to Gas Regulation Authorities:

### LOSS PREVENTION SAFE DESIGN



- ✓ Loss Prevention casing pipe design;
- ✓ Venting system designed as long-term safe mitigation measure.

### HDD CROSSING DESIGN



- ✓ HDD crossing profile;
- ✓ Production pipe installation;
- ✓ Major road crossing contingency measures.

### MONITORING OF HDD CONSTRUCTION



- ✓ Noise & Vibration monitoring;
- ✓ Pollution reduction measures;
- ✓ Remote-sensing monitoring.




# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## LOSS PREVENTION & SAFE DESIGN

Major design topics of loss prevention and safe design approach for risk mitigation of crossing were:

1. Loss prevention design of the steel casing pipe;
2. Safe design of casing pipe venting system.

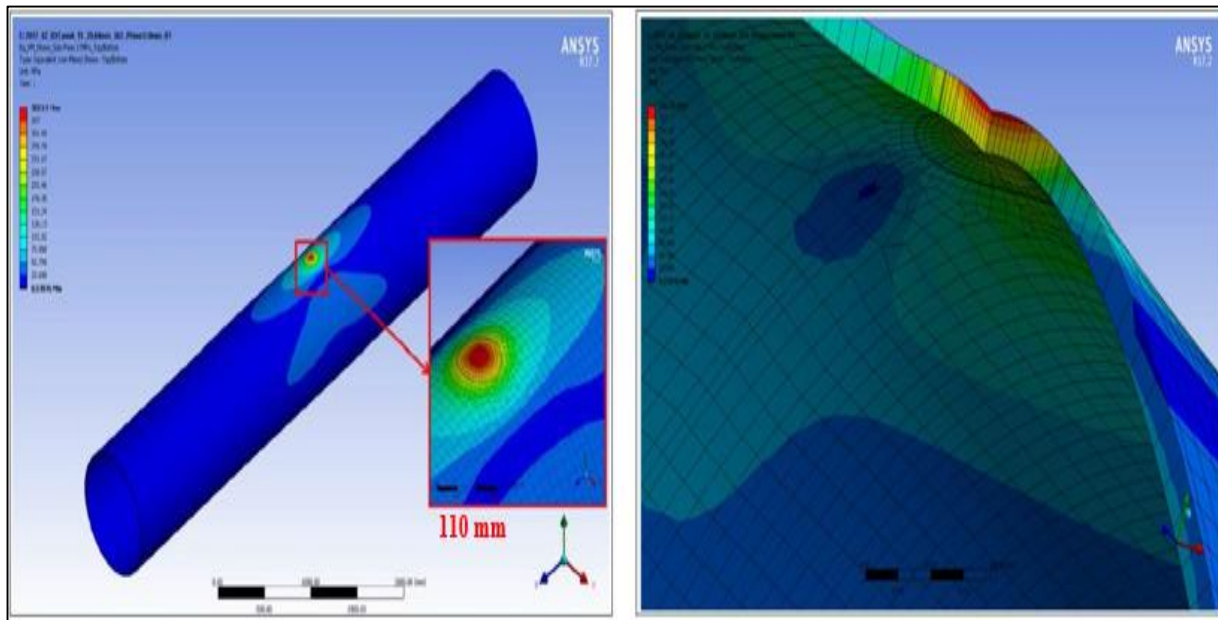


Loss prevention design of the steel casing pipe based on an accurate risk assessment:

- ✓ Steel grade (L450MB) and wall thickness (25.4mm): design to withstand possible product pipe gas leakage event and to convey potential leakages to a venting system;
- ✓ Casing pipe diameter: minimum allowable casing pipe diameter (DN850(34")) to ensure successful installation and operation of the DN600(24") 170 barg product pipe;
- ✓ Venting system adequately sized and located far from residential area.

# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## LOSS PREVENTION & SAFE DESIGN

Design of venting system as mitigation measures to ensure long-term safety of infrastructure during operational design life:

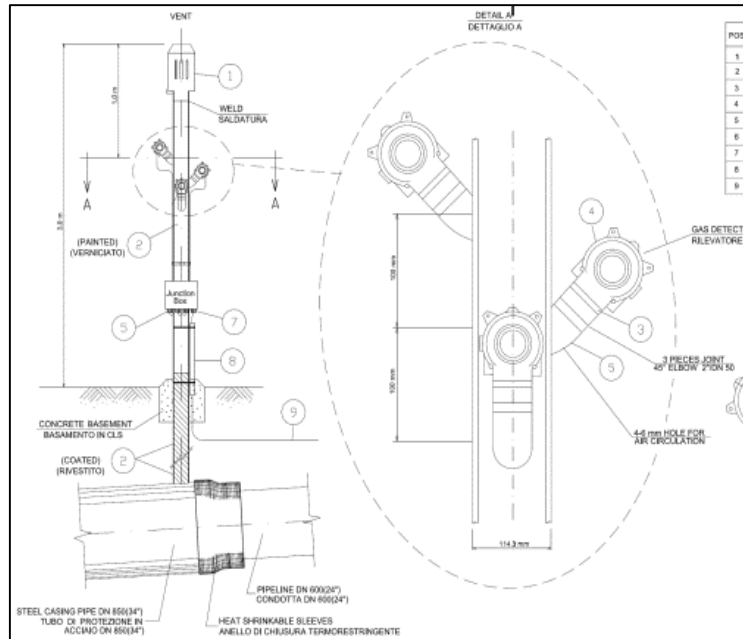

### A. Gas detection monitoring:

- ✓ Nos. 3 real-time remote-controlled GAS DETECTORS installed on each vent located at casing pipe ends;

- ✓ Permanent gas leakage ALARM SYSTEM;

### B. Product pipe design:

- ✓ welding and NDT in comply with approved international standards;
- ✓ L450ME steel grade, wt=31.75mm, with 3mm 625 alloy cladding;
- ✓ Nos. 3 layers of PE external coating;
- ✓ permanent cathodic protection by impressed current;
- ✓ corrosion monitoring during operational phase with intelligent pigging system.


Special concession issued by National Gas Authority for this crossing

# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CROSSING PROFILE DESIGN

HDD trenchless solution was design with the product pipe DN600(24"), 170 barg installed into DN850 (34") steel casing.

		Diameter DN (")	Wall thickness (mm)	Material	External coating
	Product pipe	DN 600 (24")	31.75 mm + 3 mm Alloy 625 cladding	Gr. L450ME PSL2	3LPE (3mm)
<b>HDD</b>	Casing pipe	DN 850 (34")	25.4 mm	Gr. L450MB PSL2	bare
<b>HDD</b>	FOC conduit	DN 150 (6")	7.1 mm	Gr. L360MB	3LPE (3mm)

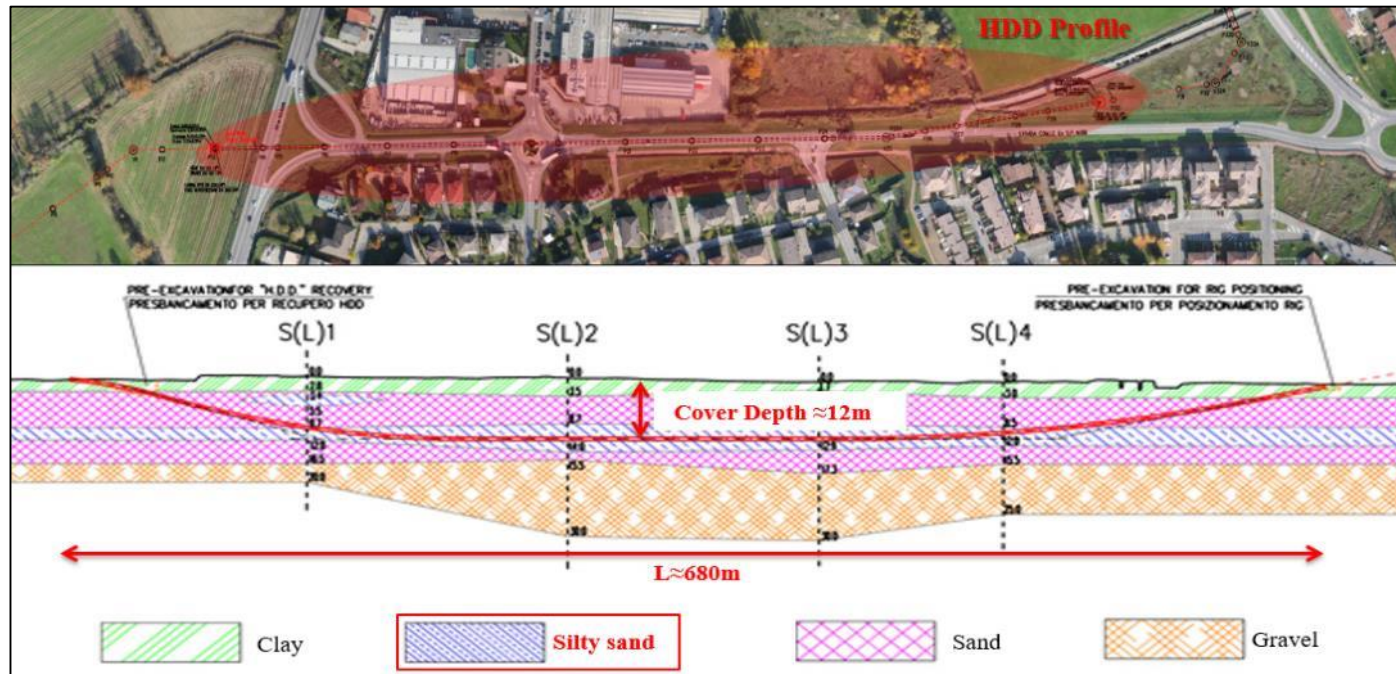

HDDs Length=680m.




# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CROSSING PROFILE DESIGN

Major issues identified during HDD profile design were:

- a) Ensure minimum horizontal distance of 20m from existing buildings (as per National Gas Regulation);
- b) Suitable launch way corridor for the 700m long HDD pipe string;
- c) Undercrossing of high traffic major road (provincial road SP 235) and several existing services.

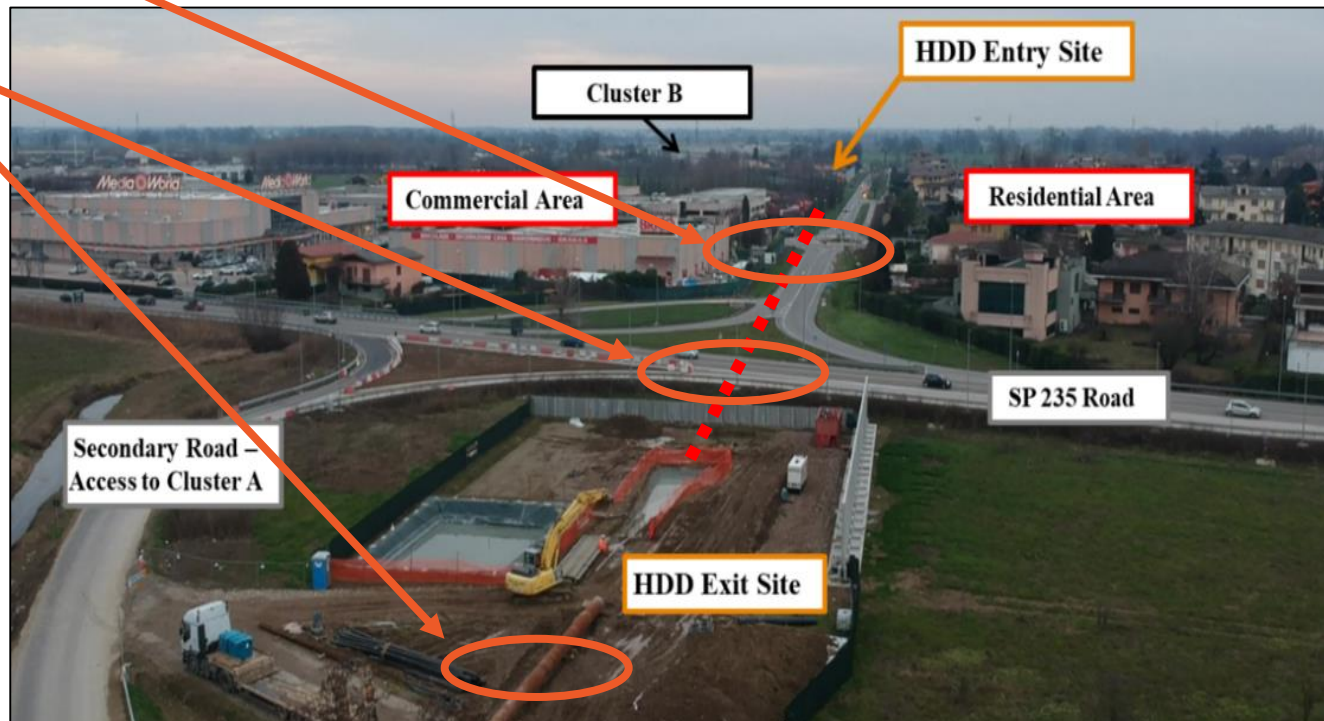


# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CROSSING PROFILE DESIGN

Major issues for definition of suitable launch way corridor for the 700m long pipe stringing:

1. Available area for launch way corridor not long enough;
2. Interference of pipe string launch way with existing access road to Cluster A plant.

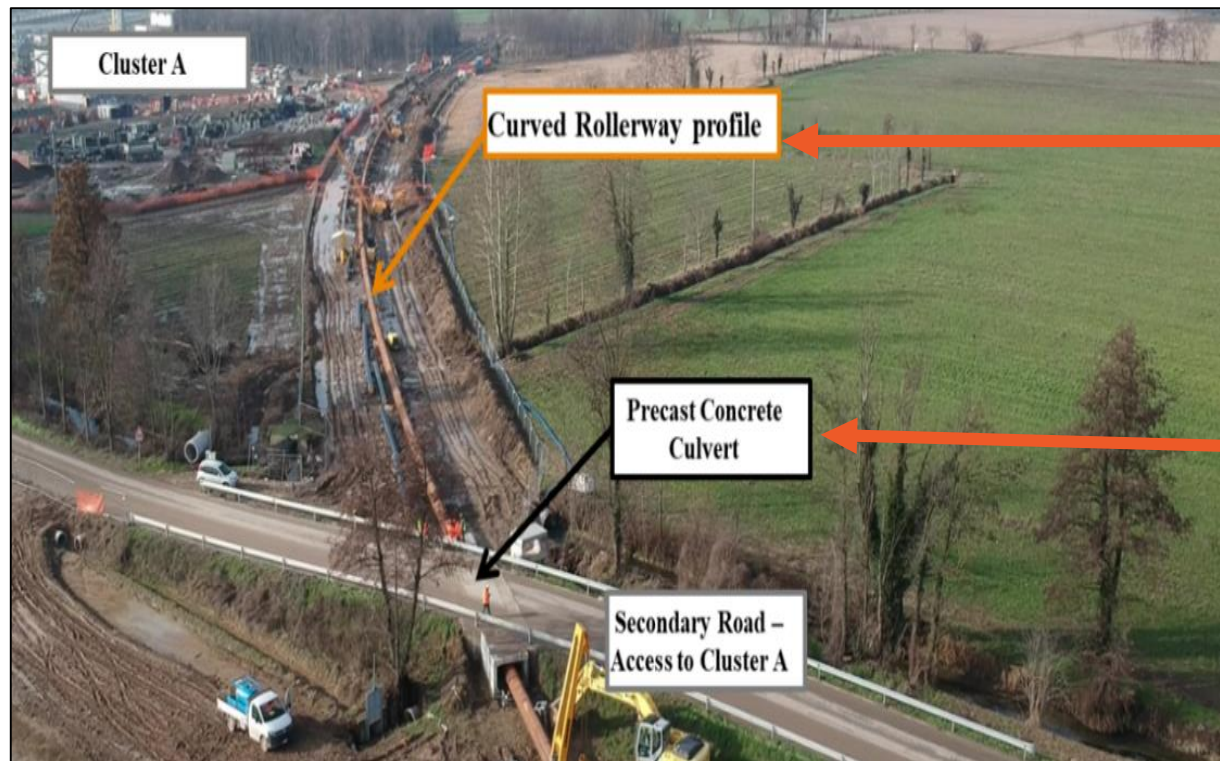

Curve corridor (700mx21m) for pipe string launch (R=1000m horizontal elastic bend radius)

Installation of precast culvert at crossing existing access road.

Culvert was designed to:

- sized allow pullback works;
- Removable concrete slab at road level as cover, as contingency in case of pipe string uplifting during pullback.



# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CROSSING CONTINGENCY MEASURES

- ✓ Road crossing length: 40m;
- ✓ HDD coverage depth: approx. 6.5m;
- ✓ DN80 (3") injection pipes installed on top of the DN850 (34") casing pipe: Nos. 2 pipes;
- ✓ Length of the Nos.2 injection pipes installed on casing pipe: 60 m;
- ✓ Volume of injected mortar for filling of HDD casing pipe overcut: 18 m<sup>3</sup>;
- ✓ Pressure of injected mortar for filling of HDD casing pipe overcut: 3 bar.






# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CROSSING INSTALLATION DESIGN

A special design of steel slit supporting DN600(24") product pipe into the DN850(34") steel casing pipe.

**Target:** ensure suitable and reliable supporting system for product pipe during insertion works, post-installation hydrotest and operational phase.

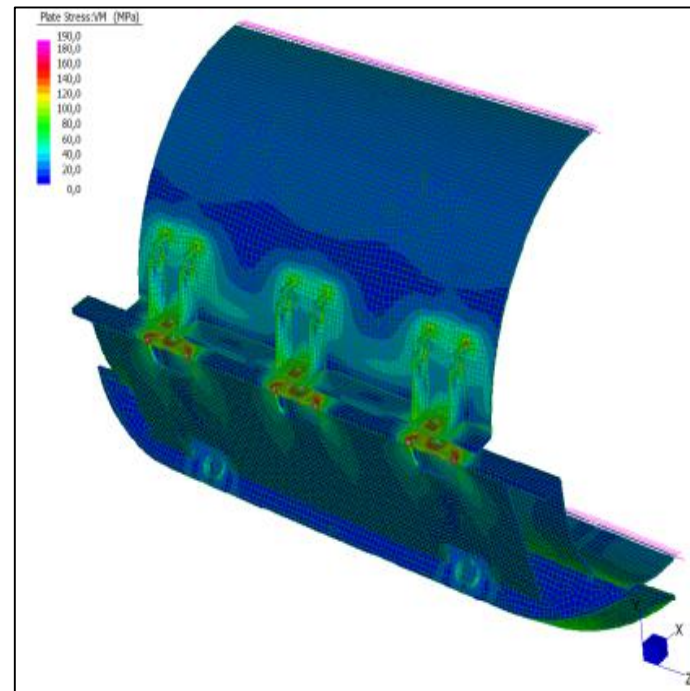

### A. Design:

- ✓ FEM analysis of slit mechanical and structural response in different conditions;
- ✓ assessment of closure bolts structural response;
- ✓ Assessment of slit wheel pins and bushing response during installation and hydrotest phases.

### B. Application:

- ✓ Friction factor approx. 0.1;
- ✓ Steel slit self-weight approx. 410kg,
- ✓ Installed with 6m interaxis.

# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS



**37<sup>TH</sup> INTERNATIONAL**  
**NO-DIG**  
**FLORENCE 2019**

## HDD CROSSING WORKS

	Expected Maximum Pulling Force	Actual Maximum Pulling Force
Casing pipe DN850( 34")	1000 kN	600 kN
Product pipe DN650(24")	370 kN	300 kN



**Pullback DN850(34") pipe string**



**RIG side (Capability 2500 kN)**



**Pullback DN650(24") pipe string**





# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS



37<sup>TH</sup> INTERNATIONAL  
**NO - DIG**  
FLORENCE 2019

## HDD CROSSING WORKS



Nov. 2017 - Mar. 2018






# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CONSTRUCTION WORKS MONITORING AND MITIGATION

**Air pollution emission reduction:** all equipment outfitted with special device (compliance with EU directive 2004/26/EC and 2000/14/EU).

**Noise mitigation measures** were designed on noise propagation numerical modelling:

- ✓ Noise reduction site layout design;
- ✓ Installation of noise reduction systems:
  - HDD exit side: 60m long x 5m high sound-absorbing walls;
  - HDD rig side: 120m long x 5m high sound-absorbing walls.
- ✓ Noise and vibration monitoring survey: Nos. 11 stations
- ✓ Maximum recorded noise level: 66dB;

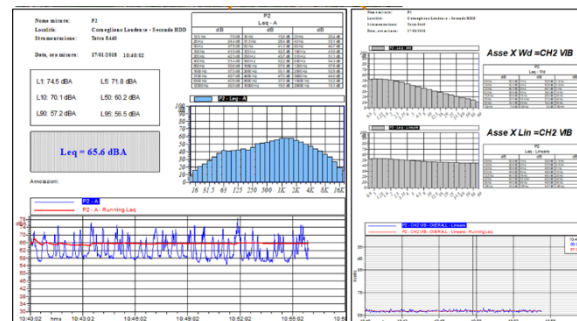



# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS

## HDD CONSTRUCTION WORKS MONITORING AND MITIGATION


InSAR remote sensing technique for work induced settlement evaluation

Persistent Scatters Interferometry (PSI) analysis prior, during and after construction works was performed in the Cornegliano area:



- ✓ Nos. 123 radar acquisition images;
- ✓ from March 2015 to April 2018 ;
- ✓ Accuracy:  $\pm 5\text{mm}$ ;

### Results:

None instability on the surrounding urban area induced by HDD works

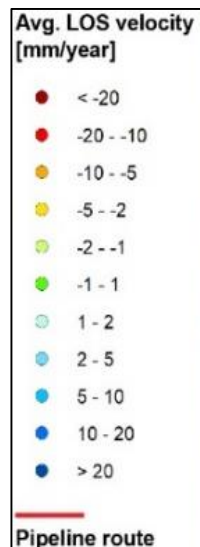

2015-2018 time frame

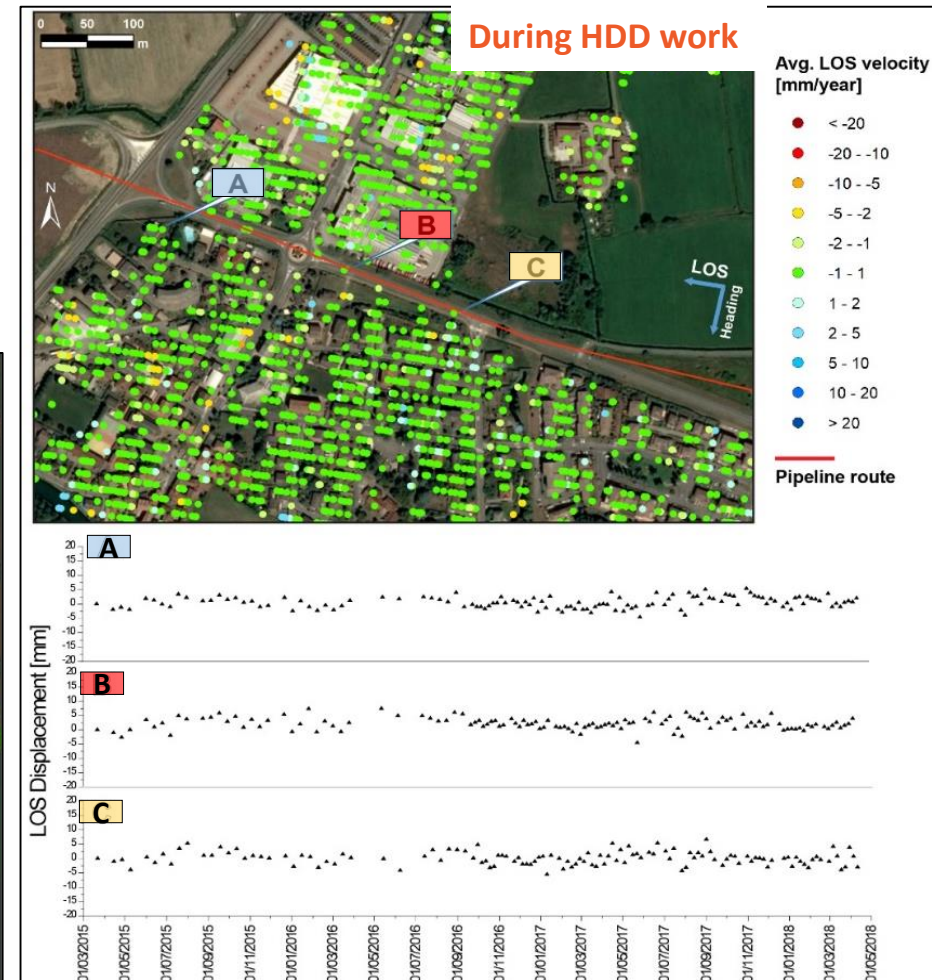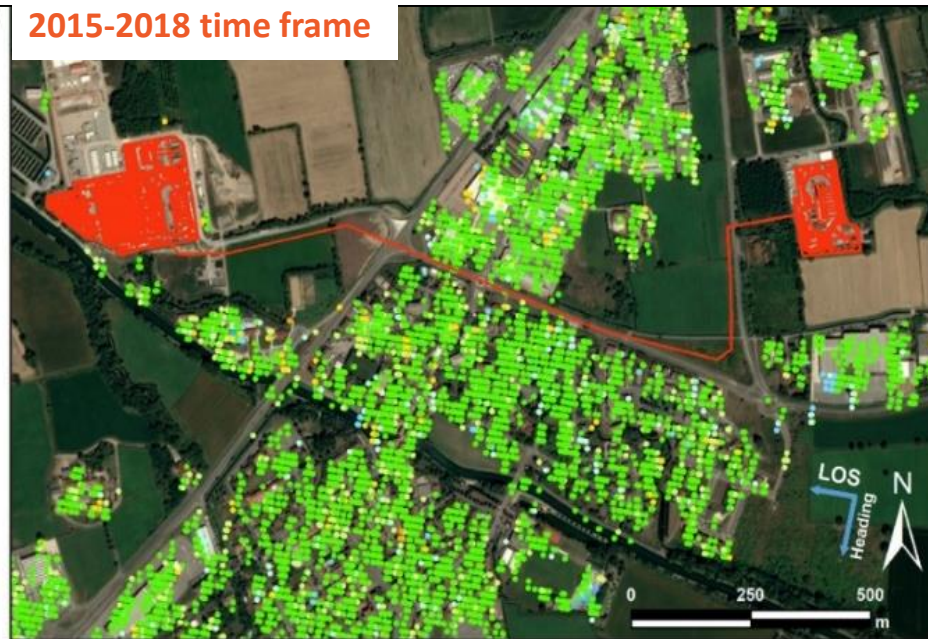


# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS



## CONCLUSIONS

### DESIGN

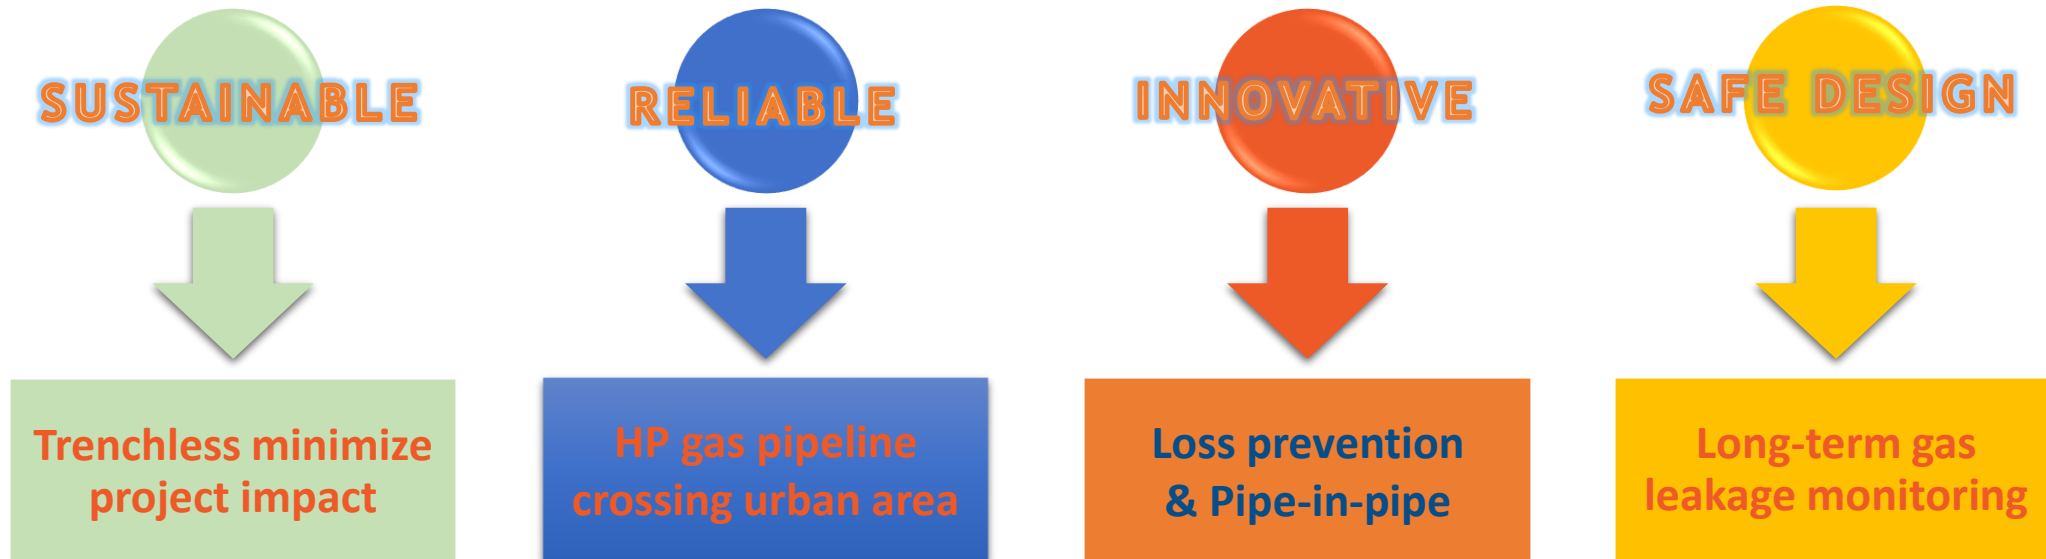

### CONSTRUCTION

- ✓ Low impact on local community of works with noise and vibration monitoring and mitigation measures



# THE CORNEGLIANO LAUDENSE NATURAL GAS STORAGE PROJECT: HDD AS SOLUTION FOR PIPELINE INSTALLATION IN URBAN AREAS



37<sup>TH</sup> INTERNATIONAL  
**NO - DIG**  
FLORENCE 2019

## THANK YOU



**Contact:**

[Vincenzo.nisii@Saipem.com](mailto:Vincenzo.nisii@Saipem.com)